

weBBoat app for Android and iOS user instructions


Your **weBBoat**'s datas:

Register your weBBoat by downloading
for free the Glomex App from App Store for
Apple devices or Play Store for Android devices




<p>1. The Glomex App for weBBoat is available to download for free from App Store for Apple or Play Store for Android.</p>	<div>Available on the App Store</div> <div>Available on Google play</div>  
<p>2. Insert the SIM CARD into the upper socket of the weBBoat SIM SUPPORT, which is located at the button of the dome. Insert the SIM with the pins facing down and the cut edge of the SIM facing outwards, as show in the picture.</p> <p>IMPORTANT: Before inserting the SIM CARD, if the SIM CARD has a PIN code, you need to remove the PIN code request.</p>	
<p>3. The weBBoat is supplied with 12V - 24V DC. The red cable represents the positive contact. The black cable represents the negative contact or GND.</p>	


4. **After the download**, you will need to install the app on your mobile phone. To install, first, you must activate the Wi-fi connection, then connect to the weBBoat. The weBBoat network is called 'WeBBoat....', which will ask for a password to access. Please see the first page of this manual for the password. As soon as you are connected, the installation is complete and the App icon will appear onto the phone.

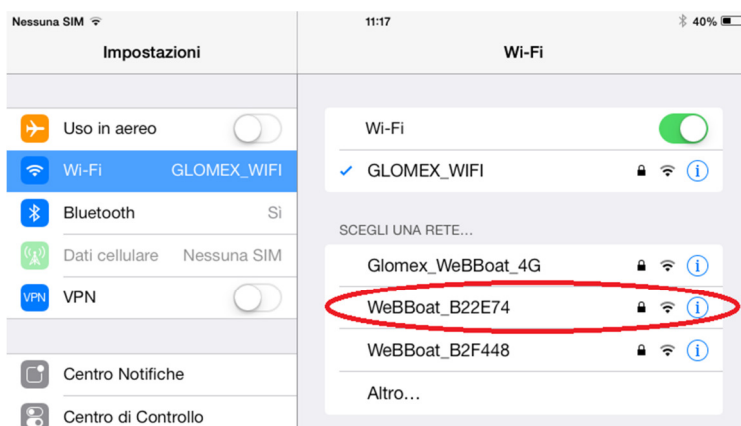


5. **Enter in the app** and choose the language, clicking on the chosen flag.

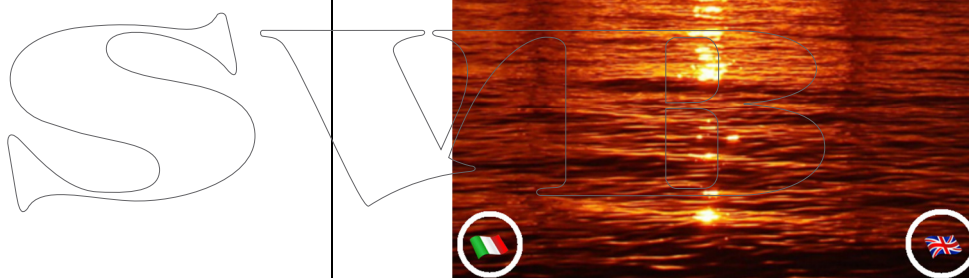

6. **If the Wi-fi is connected**, the page will display. If you find that the app isn't working, there may be no connection. In this instance check that weBBoat Wi-Fi connection is activated and try again.

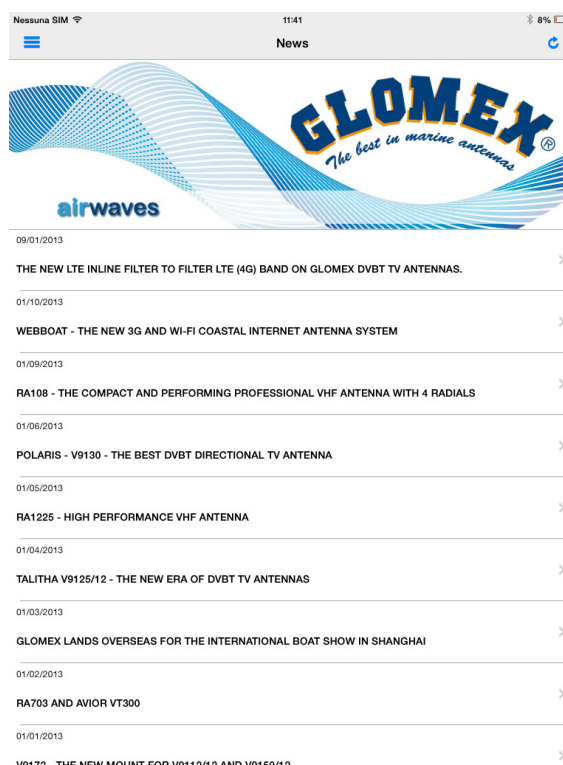

7. After choosing your language, go into the hidden pull-down menu on the left, and click on 'weBBoat Coastal Internet'.

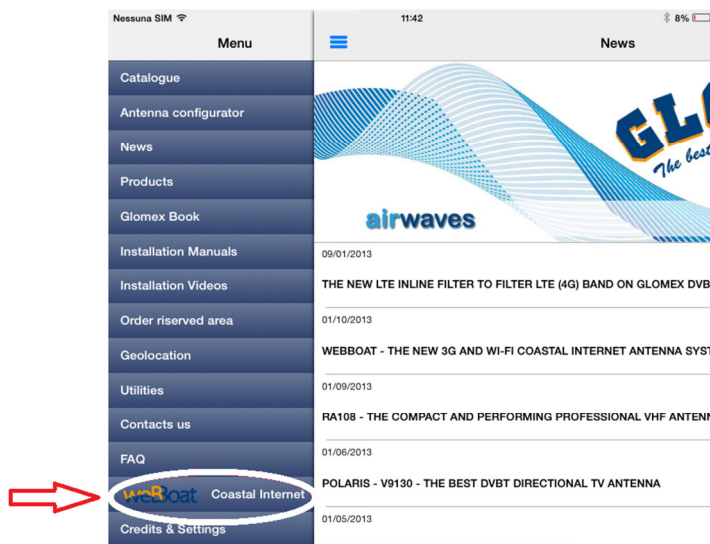

8. You will, then, be asked to register some details, fill in the required form, then click on the **Register/Save** button and wait (Fig 8A).

Insert the password: **admin01**

(Fig. 8B)

SVB

Fig. 8A

Fig. 8B

9. After your registration the weBBoat Control App page will open. **The page may be missing some information**, and may need to be refreshed. Click the refresh button out the top of the page (Fig. 9A) and wait until the process is complete. This process could take several minutes.

Once refreshed, the page will reappear with the filled in information. You will also notice that the '3G in use' box will now be green, which means that the 3G is active (Fig. 9B).

Fig. 9A


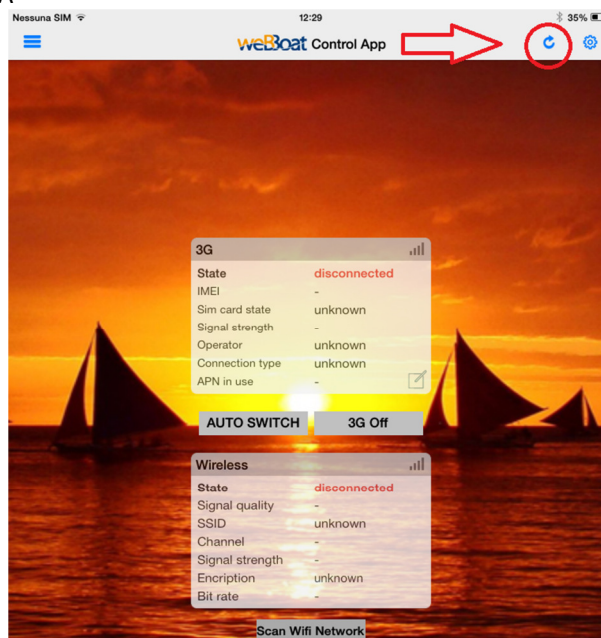


Fig. 9B

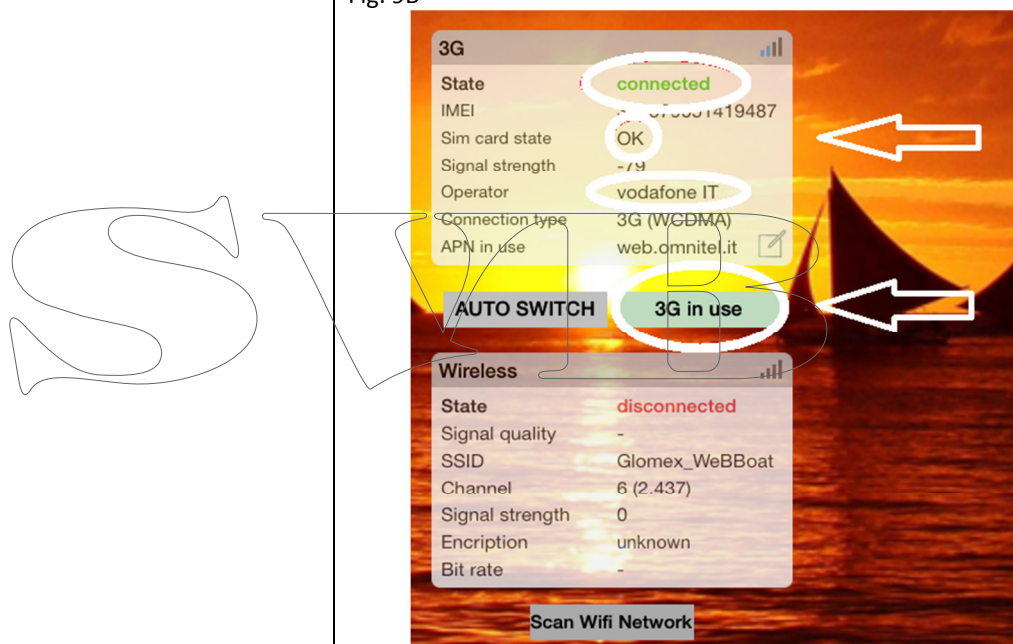


10. **To Continue**, click on the 'APN in use' (Fig. 10 A), click on the world icon on the top (Fig. 10B) and select your Country from the list (Fig. 10C), along with the the APN compatible with yours operator (Fig. 10D) and click 'OK' to confirm.

If you select the incorrect operator by mistake, click cancel and reselect.

In case of mistake in the State selection, click on the world icon to come back into the list to reselect.

Fig. 10A

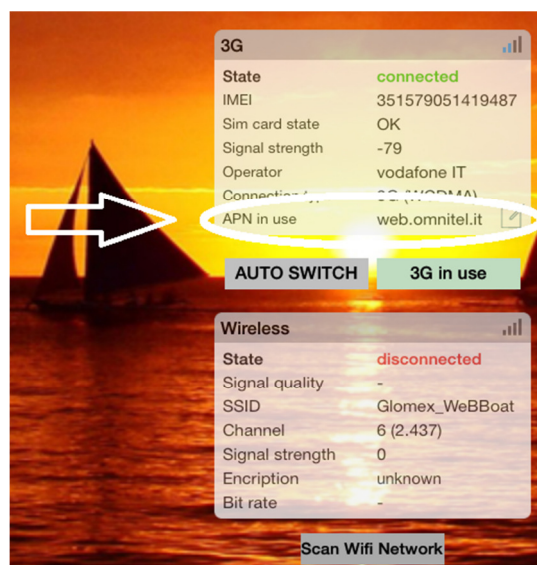

Once all of the information is correctly provided click on 'OK' (Fig. 10E) and wait for the configuration.

Note: this could take several minutes.

Fig. 10B

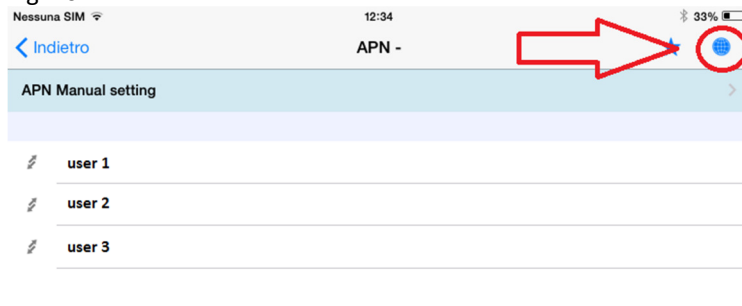


Fig. 10C

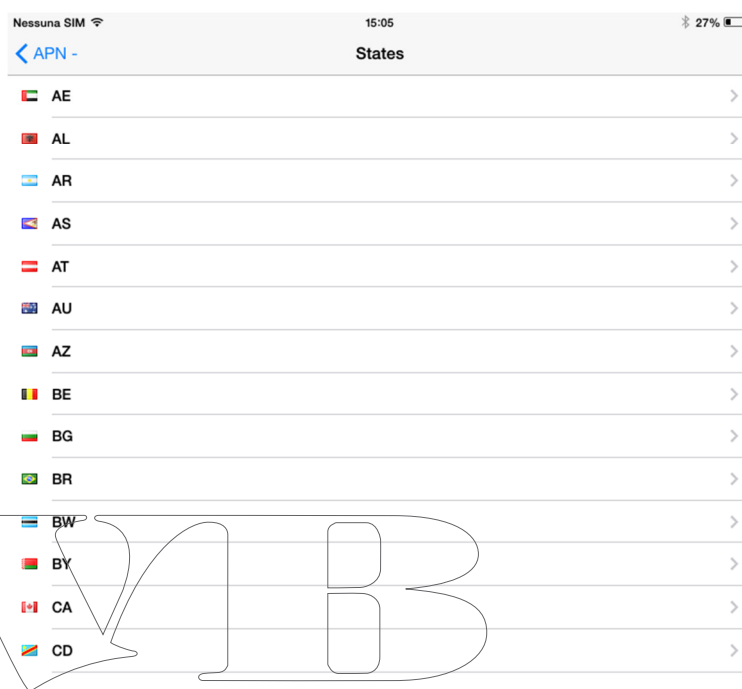


Fig. 10D


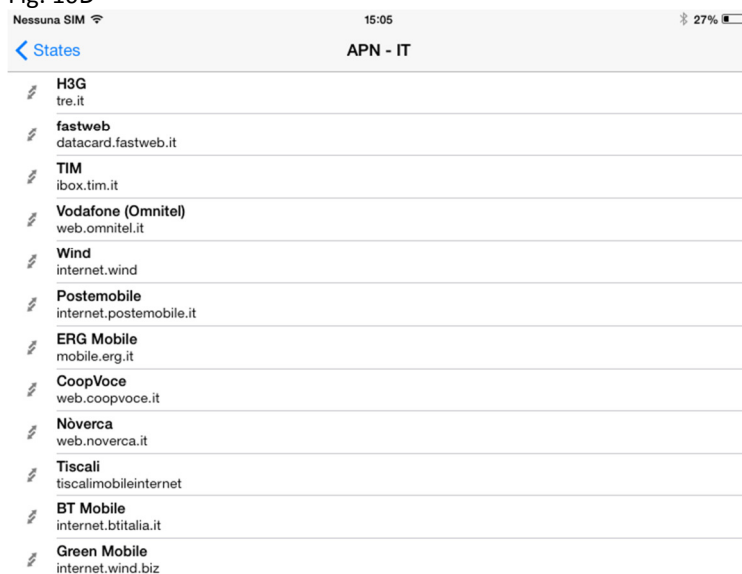


Fig. 10E

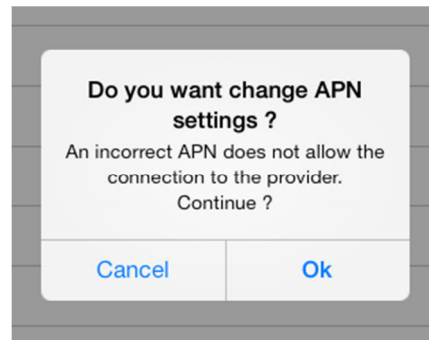

11. Once the configuration is successful, the weBBoat is ready to surf on the internet using the 3G mode.

12. If you want to add Wi-fi connection, click on **Scan Wi-Fi network** (Fig. 12A) and wait. After a few minutes a list of available Wi-Fi connections will appear. Click on the desired Wi-Fi name (Fig. 12B) and to confirm, click the **OK** button. Insert the password of the Wi-Fi name selected and click **OK/CONNECT** (Fig. 12C), and wait a few minutes. Now, the information of your selected Wi-Fi will appear in the Wireless table (Fig. 12D).

The 'auto switch' button is green and the '3G Ready' button is yellow. This means that you are now using your selected Wi-Fi network (SSID) to surf the internet.

Fig. 12A

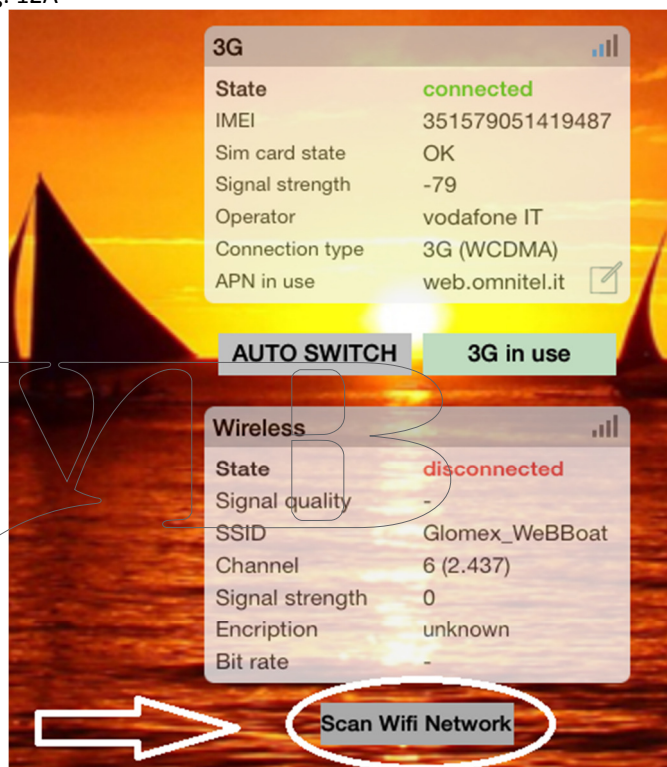


Fig. 12B



Fig. 12C


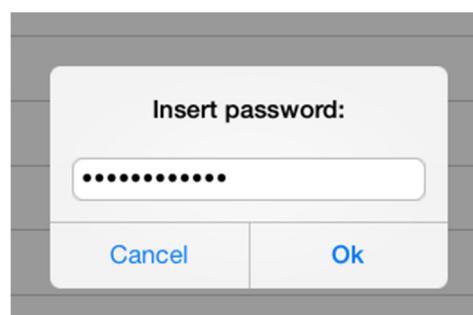


Fig. 12D

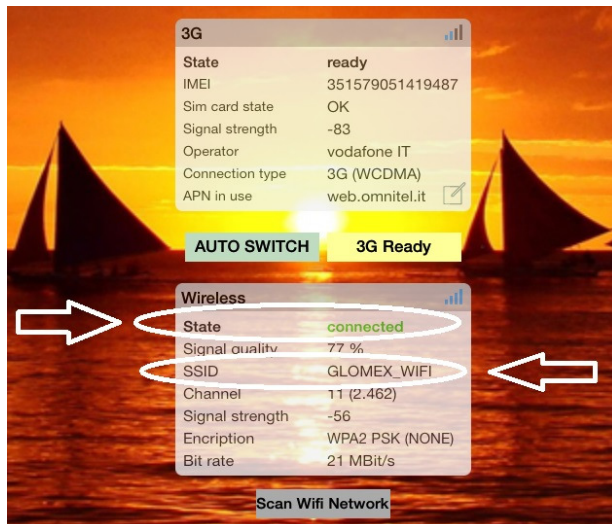

13. **Finally**, to return to 3G mode, click on the yellow '**3G Ready**' button (Fig. 13A). Wait a few minutes for the configuration to be applied. At the end of process the '3G Ready' button becomes green (Fig. 13B). This means that, now, you are connected to 3G mode.

N.B. AUTOSWITCH mode is the main WAN; 3G mode is the back up WAN.

weBBoat automatically switches from harbour or land Wi-Fi to 3G when Wi-Fi signal is weak, and *vice versa*

Fig. 13A

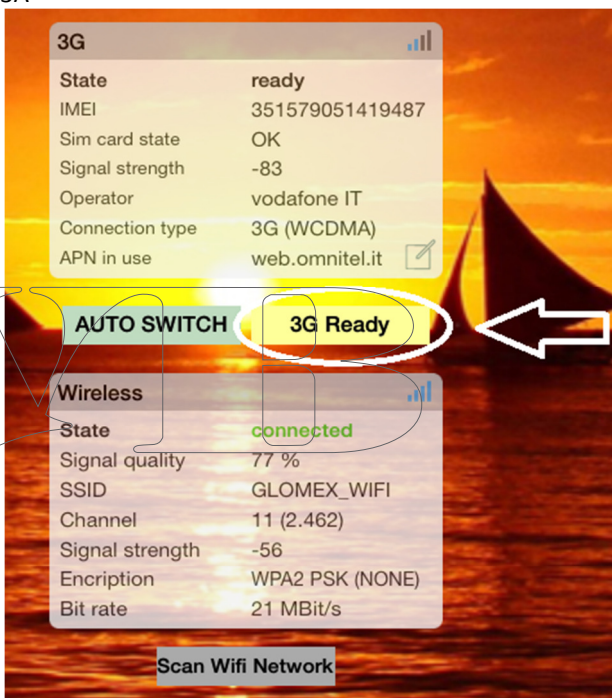


Fig. 13B

