
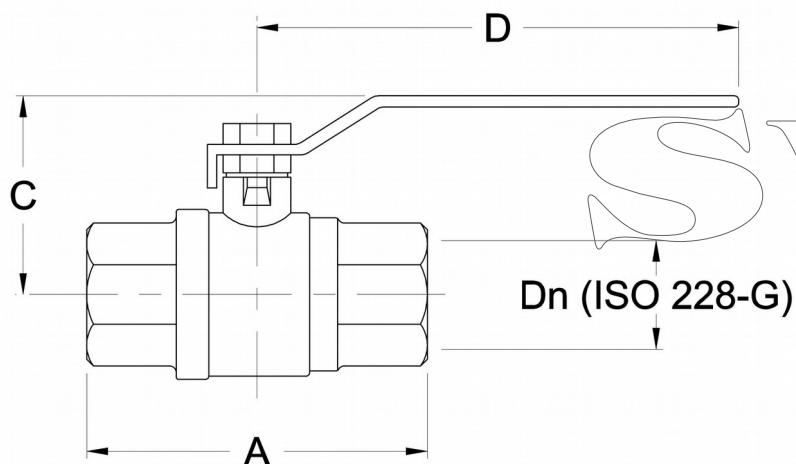


# Valvola a sfera F.F. in ottone anti-dezincificante

Art. 5140

## DZR Brass F.F. Ball Valve

(Dimensioni in mm / Dimensions in mm)

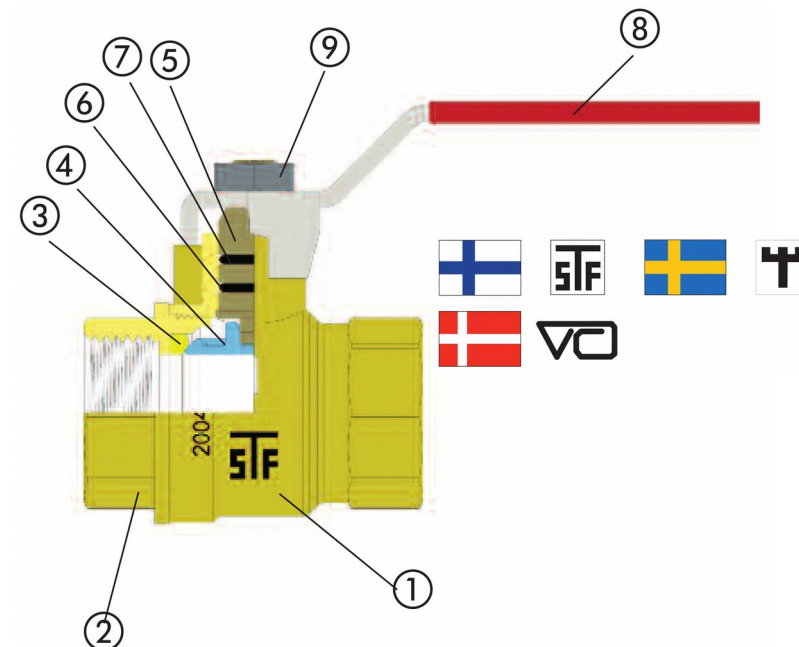

Ref.	ID	Mat.
1	Corpo/Body	Ottone DZR Brass CW602N – EN12165
2	Manicotto/Body End	Ottone DZR Brass CW602N – EN12165
3	Sede/Seat	PTFE
4	Sfera/Ball	Ottone DZR Brass CW602N – EN12165 (Cromato / Chrome plated)
5	Asta/Stem	Ottone DZR Brass CW602N – EN12164
6	O-ring	NBR
7	O-ring	HNBR
8	Leva/Handle	Acciaio inox plastificato / Plastic-coated Stainless Steel
9	Dado/Nut	Acciaio inox / Stainless Steel

<b>A</b>	43	55	61	72	82	94	112
<b>C</b>	41	54	58	66	71	80	88
<b>D</b>	80	90	90	125	125	140	140
<b>Dn</b>	3/8"	1/2"	3/4"	1"	1"1/4	1"1/2	2"

Pressione di esercizio Working pressure	Fino a / Up to 1"1/4 (incl.): PN25 Oltre / Over 1"1/4: PN16
Temp di esercizio Working Temperature	-10 °C - +100 °C